


Norman 30K Series In Line High Pressure Filters

Up to 30,000 PSI

- Stainless Steel Housing
- Pleated Stainless Steel, Sintered Stainless Steel and Glass Fiber Elements for Greater Dirt Holding Capacity
- .5 to 300 Micron




NORMAN FILTER COMPANY, L.L.C.
PHONE: 708-233-5521 • FAX: 708-430-5961

ISO 9001:2000 CERTIFIED

sales@normanfilters.com • www.normanfilters.com

Specifications on reverse side

DIMENSIONS

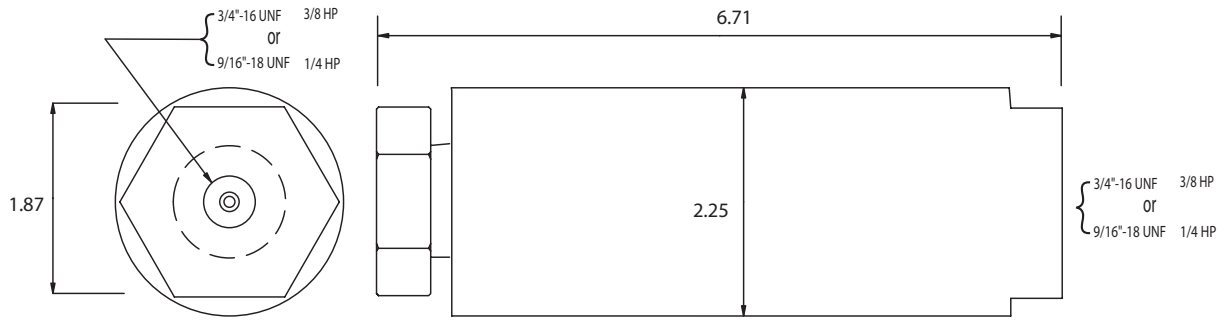

SPECIFICATIONS

Housing Material: 17-4 Stainless Steel

Element Media:
 304 Stainless Steel Mesh: 10, 18, 25, 40, 75, 150 and 300 micron ABS
 316 Stainless Steel Mesh: .5, 1, 3 and 7 micron ABS
 Glass Fiber: 3, 5 and 10 micron ABS

Flow Rate:
 .250 HP 2.5 GPM (100 SSU oil)
 .375 HP 5.5 GPM (100 SSU oil)


Operating Pressure: 30,000 PSI
 Proof Pressure: 45,000 PSI
 Burst Pressure: 120,000 PSI
 Housing Temperature: -148°F to +350°F

Element Temperature Range:
 304 Stainless Mesh: -425°F to +1,000°F
 316 Stainless Sintered: -425°F to +1,000°F
 Glass Fiber: -70°F to +300°F

O-Ring Temperature Range:
 Buna-N -40°F to +250°F
 Viton -20°F to +350°F
 Ethylene Propylene: -65°F to +300°F
 Teflon™ -148°F to +400°F
 Kalrez™ -40°F to +600°F

Teflon™ and Kalrez™ are registered trademarks of DuPont.

HOW-TO-ORDER

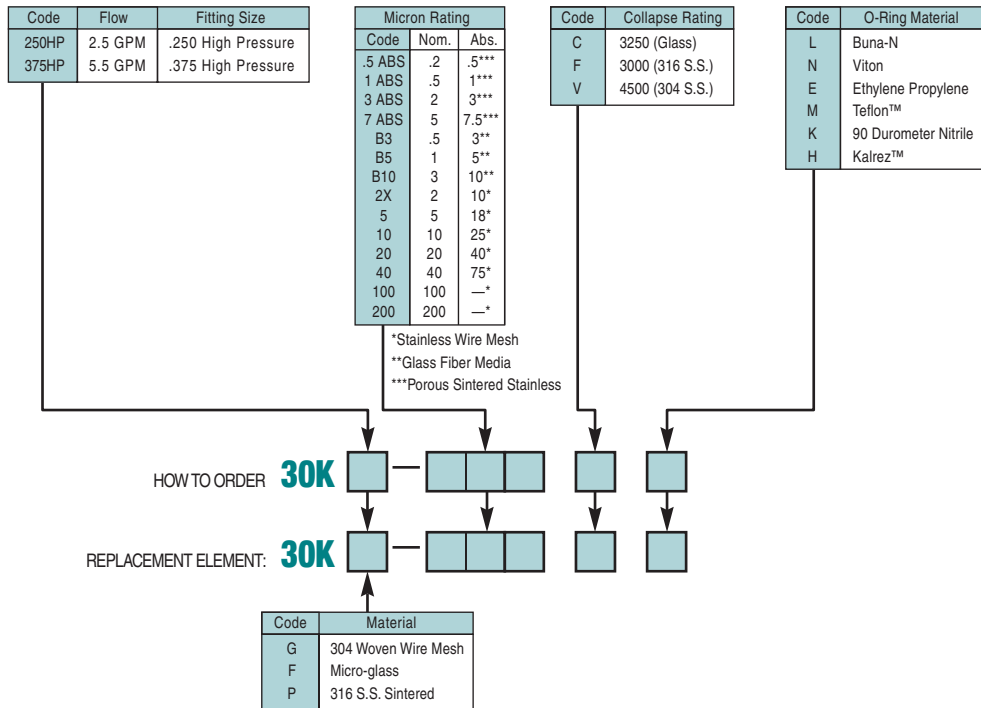

NORMAN FILTER COMPANY, L.L.C.

9850 SOUTH INDUSTRIAL DRIVE
 BRIDGEVIEW, ILLINOIS 60455

ISO 9001:2000 CERTIFIED

PHONE: 708-233-5521

FAX: 708-430-5961

EMAIL: SALES@NORMANFILTERS.COM

WWW.NORMANFILTERS.COM

DISTRIBUTED BY: