

**Norman
8400 Series
Tank Top Filters
300 gpm Return
100 gpm Suction**




NORMAN FILTER COMPANY, L.L.C.
PHONE: 708-233-5521 • FAX: 708-430-5961

Norman Tank Top Filters



TYPICAL INSTALLATIONS

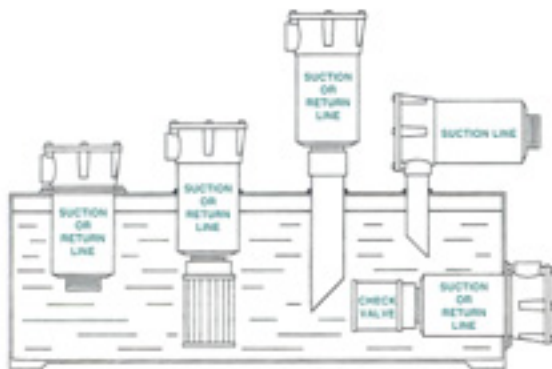

Fluid Conditioners

Norman Tank Top filters are used to condition a wide variety of fluids. Whether your application is hydraulic, chemical processing or industrial clarification, Norman filters will remove particulate and water contaminants from your system to keep it running longer. Filters increase the life of pumps, valves, regulators and other components in your system, with paybacks of longer system life, reduced down-time and improved productivity. Norman offers the broadest filter line in the industry. This wide variety of sizes, materials, filtration media and optional accessories, all available from stock, allows you to select the model with the best price/performance value for your application.

Housings

Norman Tank Top filter housings are made of either aluminum or steel and are rated up to 500 psi maximum operating pressure. These housings come in four basic sizes, with flow rates up to 300 gpm return line and 100 gpm suction line (with 100 ssu oil). Port sizes range from 1/2" to 3" NPT, 1/2" to 1-1/2" SAE or 4 bolt flange. All pressure ratings are static, for applications calling for pulsating or pressure spikes, consult factory.

Elements

The replacement element is the heart of the filter. Norman offers four media types in a variety of micron ratings. Our water absorbing media is designed to remove water from your hydraulic or lube oils.

Cellulose: Resin-impregnated cellulose media has low cost and disposable convenience. Being a depth type filter, it has moderate dirt holding capacity for extended filter life. Available in 3, 10 and 25 micron efficiency ratings and various flow through options. All Norman cellulose elements are bonded with epoxy for excellent fluid compatibility.

Glass Fiber: Multi-layer glass fiber elements use aerospace technology to produce high efficiency silt-control filtration. Available in 3 and 10 micron with a beta efficiency rating of 75. Glass fiber elements are all epoxy bonded and can withstand temperatures ranging from - 65° F to 250° F.

Stainless Steel Wire Mesh: Available in four mesh sizes, 30,60,100 and 200 with optional magnetic inserts (100 mesh is standard). Wire mesh elements are all epoxy bonded and can withstand temperatures ranging from - 65° F to 250° F.

Water Absorbing: The water absorbing media functions as both a particulate and water removal filter. This filter media is available in 3 and 10 micron.



Optional Accessories: Norman Tank top filters have a number of optional accessories in stock to modify our standard housings to meet your specific application requirements:

Bypass Relief Valve: Internal valve relieves pressure during flow surges or cold start-up.

Gauge Ports: Allows operator to view gauge to determine the appropriate time for filter change-out.

Bottom Port Options: Six sizes of bottom ports are available; 1-1/2 to 3" npt male pipe, 1-1/2" extended pipe, 1 to 1-1/4" npt female.



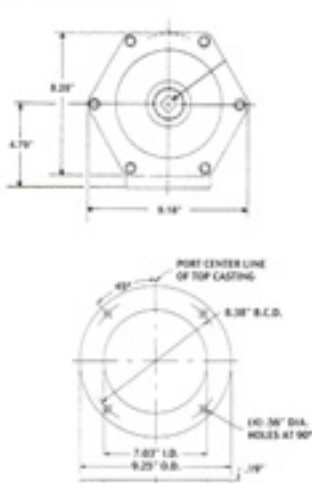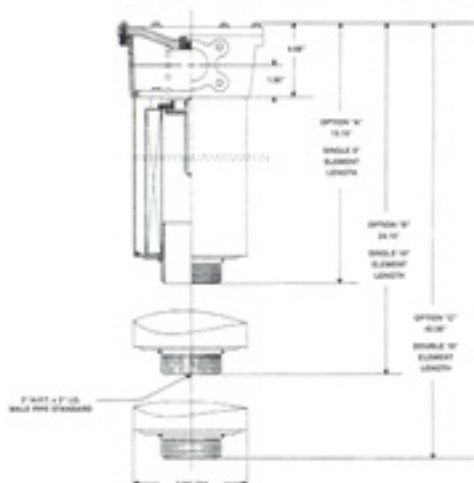

SPECIFICATIONS

Rated Flow:

300 GPM Return Line
100 GPM Suction Line

Housing Material:

Die Cast Aluminum Head
Steel Bowl

Pressure Rating:

300 psi maximum operating pressure

Temperature:

-65° F. to 250° F.

Options:

Relief Valve Setting: 0,3,5,15,25,50 psi
Gauge Port

Warning: 80 PSI ▲ P max. without by-pass

How To Order: 84 - XXXX - X - XX - X - (X.XX) - XXXX

For Elements
See Back Cover

Code	Port Size & Type
2400	2" (4) Bolt SAE Flange
2824	2 1/2" (4) Bolt SAE Flange & 2" NPTF Combination
3200	3" (4) Bolt SAE Flange

Code	Port Size & Type
1	Single 9" Element Length
2	Single 18" Element Length
4	Double 18" Element Length

Code	Port Size & Type
00	No By-Pass Valve
03	3 PSI
05	5 PSI
15	15 PSI
25	25 PSI
50	50 PSI

Code	Description
0.00	Customer to weld flange To filter housing
Dimensions in inches carried out two (2) decimal places. Ex. 8 9/16" = 8.56	
Desired height from Casting port center line Mounting surface (reservoir) Note Mfg. Tolerances ± .06"	

Code	Mounting Flange Option
0	No Flange
B	Bolt Flange
W	Weld Flange

ELEMENT SELECTION

Part Number	Filtration Rating (Nominal)	Average Beta 10	Filter Media Area	Dirt Holding Capacity	Element Dimensions			Flow Direction Through Element	Carton Quantity	Carton Weight	Pallet Quantity	Pallet Weight
					OD	ID	OAL					
84A-3	3 Micron	15.0	1240 Sq. In.	52 Grams	5.18"	3.4"	9.13"	Bi-Directional	12 Pcs.	26 Lbs.	288 Pcs.	660 Lbs.
84-A10	10 Micron	9.0	1520 Sq. In.	61 Grams	5.18"	3.4"	9.13"	Bi-Directional	12 Pcs.	26 Lbs.	288 Pcs.	660 Lbs.
84G-141R	141 Micron	—	232 Sq. In.	15.08 Grams	5.18"	3.4"	9.13"	Outside To Inside	12 Pcs.	24 Lbs.	288 Pcs.	610 Lbs.
84G-141S	141 Micron	—	232 Sq. In.	15.08 Grams	5.18"	3.4"	9.13"	Inside To Outside	12 Pcs.	24 Lbs.	288 Pcs.	610 Lbs.
842A-3	3 Micron	15.0	2475 Sq. In.	104 Grams	5.18"	3.4"	18.13"	Bi-Directional	6 Pcs.	22 Lbs.	144 Pcs.	565 Lbs.
842-3AQ	3 Micron	60.0	1250 Sq. In.	52 Grams	5.18"	3.4"	18.13"	Bi-Directional	6 Pcs.	26 Lbs.	144 Pcs.	660 Lbs.
842A-10	10 Micron	9.0	3040 Sq. In.	122 Grams	5.18"	3.4"	18.13"	Bi-Directional	6 Pcs.	24 Lbs.	144 Pcs.	610 Lbs.
842-10AQ	10 Micron	5.6	1250 Sq. In.	26 Grams	5.18"	3.4"	18.13"	Bi-Directional	6 Pcs.	26 Lbs.	144 Pcs.	660 Lbs.
842A-25	25 Micron	1.5	3040 Sq. In.	122 Grams	5.18"	3.4"	18.13"	Bi-Directional	6 Pcs.	22 Lbs.	144 Pcs.	565 Lbs.
842G-141R	141 Micron	—	465 Sq. In.	30.22 Grams	5.18"	3.4"	18.13"	Outside To Inside	6 Pcs.	22 Lbs.	144 Pcs.	565 Lbs.
842G-141S	141 Micron	—	465 Sq. In.	30.22 Grams	5.18"	3.4"	18.13"	Inside To Outside	6 Pcs.	22 Lbs.	144 Pcs.	565 Lbs.
84M-3	B3 =75	—	1297 Sq. In.	51.88 Grams	5.18"	3.4"	9.13"	Outside To Inside	12 Pcs.	26 Lbs.	288 Pcs.	660 Lbs.
84M-10	B10 =75	—	1592 Sq. In.	195.62 Grams	5.18"	3.4"	9.13"	Outside To Inside	12 Pcs.	26 Lbs.	288 Pcs.	660 Lbs.
842M-3	B10 =75	—	2594 Sq. In.	155.64 Grams	5.18"	3.4"	18.13"	Outside To Inside	6 Pcs.	24 Lbs.	144 Pcs.	610 Lbs.
842M-10	B10 =75	—	3183 Sq. In.	191 Grams	5.18"	3.4"	18.13"	Outside To Inside	6 Pcs.	24 Lbs.	144 Pcs.	610 Lbs.

NOTE: Standard – 100 Mesh stainless steel wire cloth is standard for filter elements. Optional – 30, 60, & 200 Mesh wire cloth.

